


BWR Rotary Cable Gland



Size :	00 to 08
Function :	Providing mechanical cable retention &electrical continuity via armoured wire termination and protect armour wire in dry indoor area for SWA cable.
Features :	Easy to Install, Rotary Cone, Nickel Plated
Ingress Protection:	IP2X
Thread:	Metric
Operating Temp:	-60°C to +200°C
Cable Type:	Single Wire Armour (SWA) Cable
Material:	Nickel Plated Brass CW614N
Accessories:	Earth Tag, PVC Shroud

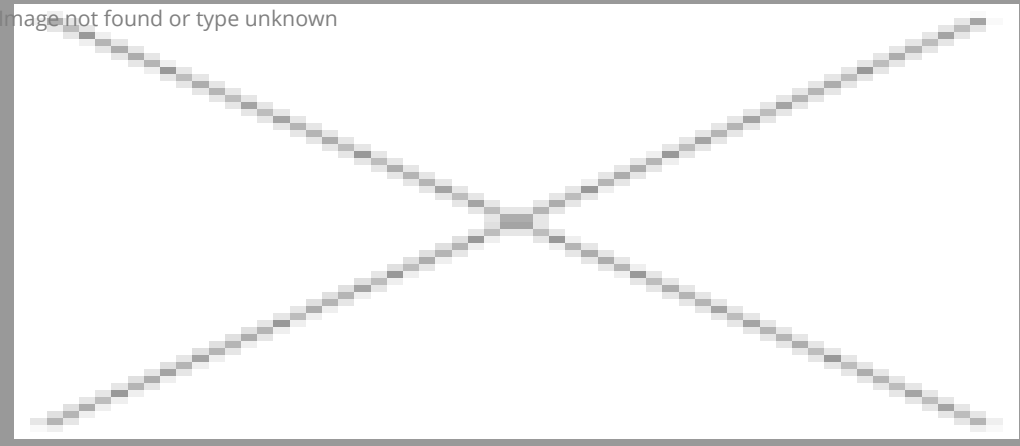

Table

Gland Size	Thread "C"	Thread Length "D"	Cable Dia.		Protrusion Length "F"	A/F	A/C	CAT NO.
			Min. "A"	Max. "B"				
00	M20	16.00	12.00	16.00	28.50	22.00	24.00	MCBWR-0
01	M20	10.00	14.00	21.20	30.00	27.00	29.50	MCBWR-1
02	M25	10.00	20.20	27.00	32.00	35.00	38.00	MCBWR-2
03	M32	10.00	26.20	33.40	37.00	42.00	45.00	MCBWR-3
04	M40	15.00	32.50	39.80	42..25	52.00	58.00	MCBWR-4

05	M50	15.00	44.40	52.50	49.00	63.00	70.00	MCBWR-5
06	M63	15.00	55.30	65.50	49.50	80.00	85.00	MCBWR-6
07	M75	15.00	69.50	79.00	58.70	95.00	100.00	MCBWR-7
08	M80	15.00	74.00	84.00	38.00	95.00	100.00	MCBWR-8

Dimension are in mm