

CXT Cable Gland



Size :	16mm to 90mm
Standard :	BS 6121: Part-1:2005, EN 50262:1999, IEC62444:2010
Function :	Providing environmental seal on outer sheaths of all types of unarmoured cable in door and outdoor area.
Ingress Protection:	IP66
Material:	Brass CW614N, Stainless Steel 316L
Thread:	Metric,NPT
Operating Temp:	-60°C to +125°C
Features:	Outer Displacement Seal
Seal Material:	LSOH Silicone Seal & LSOH Nylon Washer
Accessories:	PVC Shroud, Earth Tag, Galvanized Steel Lock Nut and Brass Washer
Cable Type:	All types of screened flexible wire braid (e.g. CY/SY) or wire braid armoured cable.

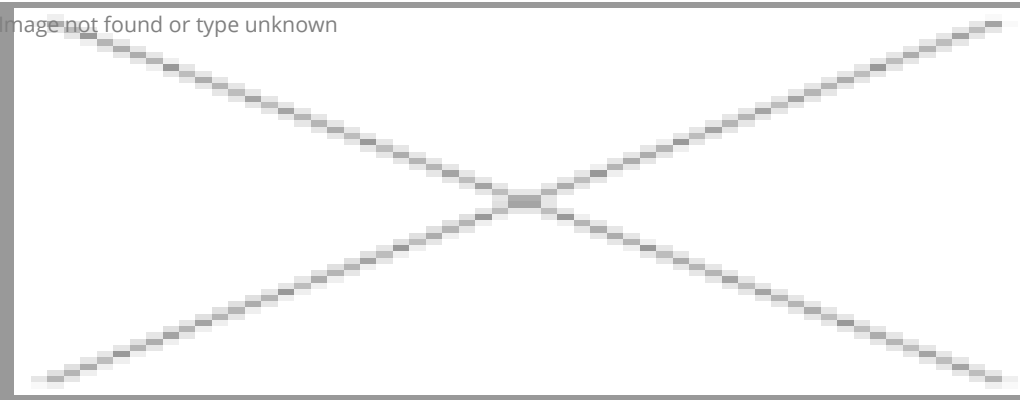


Table											
Size	Thread "C"		Dispational Threaad		Thread Length "D"	Cable Dia. "A"		Protrusion Length "F"	A/F	A/C	CAT NO.
	Metric	NPT	Matric	NPT		Min.	Max.				
20s16	20	½"	25	¾"	10.00	3.10	8.60	25.75	24.00	26.20	MCCXT-16
20S	20	½"	25	¾"	10.00	6.10	11.70	25.75	24.00	26.20	MCCXT-20S

20	20	1/4"	25	3/4"	10.00	6.50	13.90	26.25	27.00	29.50	MCCXT-20
25	25	1/4"	32	1"	10.00	11.30	19.90	34.00	36.00	39.20	MCCXT-25
32	32	1"	40	1 1/4"	10.00	17.00	26.20	35.00	41.00	45.00	MCCXT-32
40	40	1 1/4"	50	1 1/2"	15.00	23.60	32.10	35.00	49.00	53.00	MCCXT-40
50S	50	1 1/2"	63	2"	15.00	31.50	38.20	33.00	54.50	60.00	MCCXT-50S
50	50	2"	63	2 1/2"	15.00	35.80	44.00	37.00	60.00	65.00	MCCXT-50
63S	63	2"	75	2 1/2"	15.00	41.70	50.00	34.25	67.50	72.00	MCCXT-63S
63	63	2 1/2"	75	3"	15.00	47.50	56.00	37.25	75.00	80.00	MCCXT-63
75S	75	2 1/2"	90	3"	15.00	55.00	62.00	40.75	80.00	85.00	MCCXT-75S
75	75	3"	90	3 1/2"	15.00	62.00	68.00	44.00	84.00	90.00	MCCXT-75
90	90	3 1/2"	100	4"	18.00	67.00	79.00	51.50	106.00	114.00	MCCXT-90

Dimensions are in mm