


Thread Seal



Material:	Nylon
Size :	M16 to 1 M100 & ½" to 3 ½" NPT
Standard :	EN60529
Features :	1. Used for high vibration resistance due to positive equipment contact. 2. Excellent pretensioning. 3. Through proper radius selection, no splitting/cracking occurs during tightening. 4. Extensive application, flexibility and minimizes stocks. 5. Minimum Thickness of washer is 2mm

Thread seal are used to maintain IP rating between cable gland and enclosure.it is necessary to fit on entry thread of cable gland.For Explosion Proof Equipment ,it is necessary to maintain the integrity of ingress protection at which equipment has been rated.

Fitting Sequence

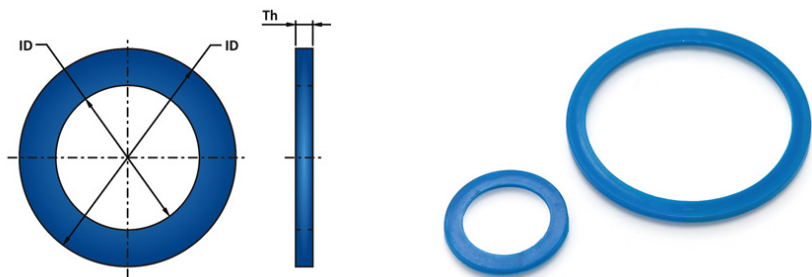

Table

Metric Size	NPT Size	Outer Dia.(OD)	ID	TH
CEST -16	M16	25.00	16.50	2.00
CEST -20	M20	30.00	20.20	2.00
CEST -25	M25	34.00	25.30	2.00

CEST -32	M32	44.00	32.50	2.00
CEST -40	M40	50.00	40.30	2.00
CEST -50	M50	63.00	50.50	2.00
CEST -63	M63	76.00	63.50	2.00
CEST -75	M75	95.00	75.50	2.00
CEST -90	M90	110.00	90.50	2.00
CEST -100	M100	125.00	100.50	2.00
CEST -012	½" NPT	30.00	21.50	2.00
CEST -034	3/4" NPT	34.00	27.00	2.00
CEST -010	1" NPT	44.00	33.70	2.00
CEST -114	1 ½" NPT	50.00	42.50	2.00
CEST -112	1 ½" NPT	63.00	48.50	2.00
CEST -200	2"NPT	76.00	60.60	2.00
CEST -212	2 ½"NPT	95.00	73.50	2.00
CEST -300	3"NPT	110.00	89.30	2.00
CEST -312	3 ½" NPT	125.00	102.00	2.00